



Otter Hitch Pivot Item 200037 (0402) Instructions




Parts included



Assembled Unit

1. Take existing hitch and slide into the bracket, aligning the hole in the hitch with the hole in the bracket that is nearest the angled corner. Fasten with the 5/16 bolt , washers and nylock nut. Repeat on the other side.



Align hole in hitch
with this hole in the
bracket.

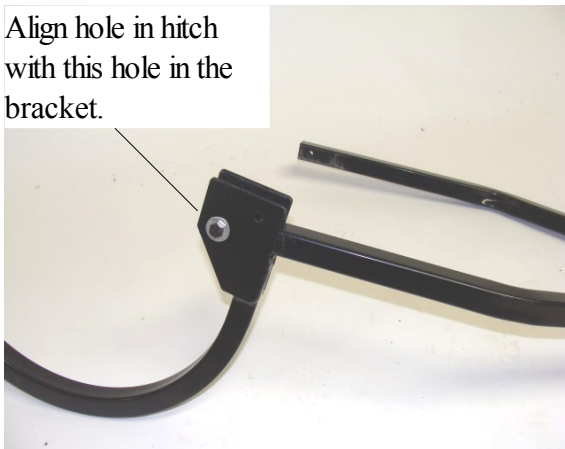


Fasten here with 5/16 bolts, washers and
nylock nuts.



2. Install lynch pins in the remaining hole on both pieces. The pins will be on top of the hitch tube and will hold it in place while towing.

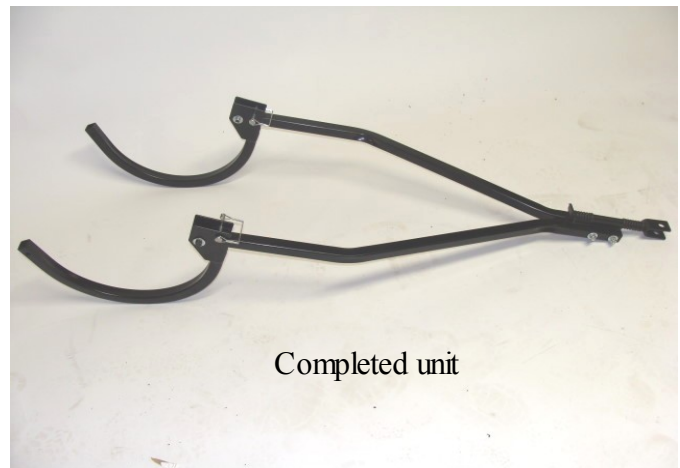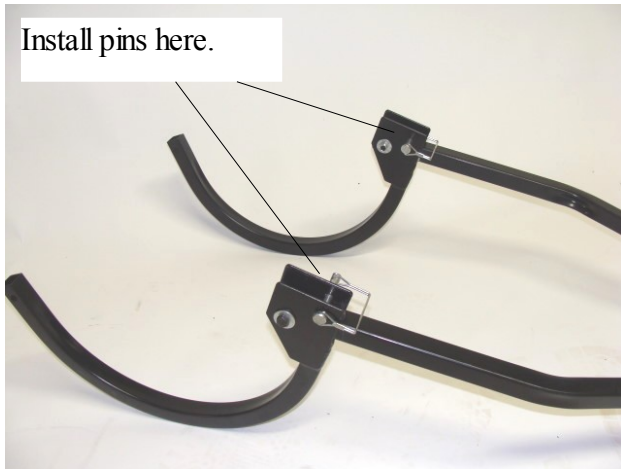

3. Attach completed hitch and pivot to the sled using the pins that came with the hitch.

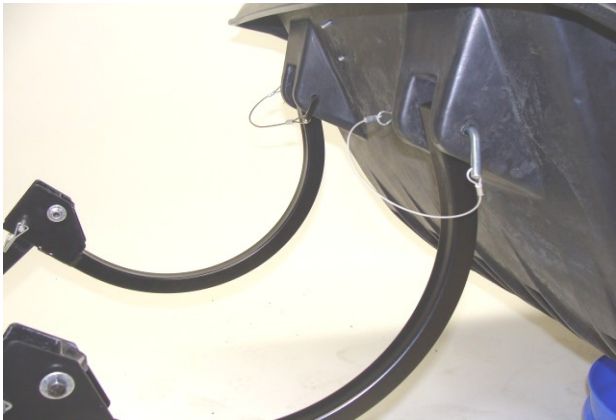

4. To operate hitch pivot remove the lynch pins and then pivot the hitch up over the top of the sled. Install the fabric coupler sleeve to help protect the cover during transport. Reinsert the pins in the pivot to keep from losing them.

